


TECHNICAL DATA

	Large
Design	
Box size [H x D]	140 x 130 mm
Square	✓
Bottom bar retractable	✓
Wind resistance	
Wind class EN13561:2004	3
Guaranteed wind resistance	Up to 130 km/h in closed position
Control	
Detecto Renson motor Safety First	✓
Somfy io motor	✓

DIMENSIONS

	Large				
Dimensions single screen					
Glass fibre fabric Sergé / Natté / Privacy	Min. width Somfy io	900 mm			
	Min. width Detecto	670 mm			
	Max. width	3600 mm	4800 mm	5600 mm	6000 mm
	Max. height	6000 mm	5800 mm	4500 mm	3800 mm
	Max. surface	21,6 m ²	27,8 m ²	25,2 m ²	22,8 m ²

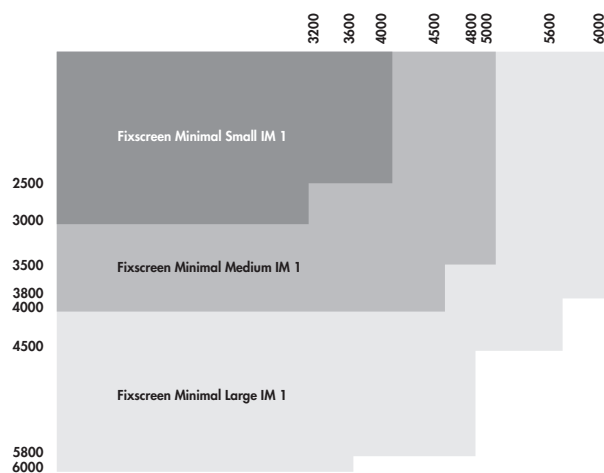


Note:

- Screens are always motorized.
- 2 screens can be linked to one another [box next to box - 1 motor/screen].
Dimensions for a single screen also apply for a linked screen with a maximum total combined width of 10.000 mm.
- L head box - Mandatory fixation on the sides, supplementary fixation in the middle from 3600 mm width onwards.

DURABILITY






Technology	
Fixscreen-technology	✓
Smooth-technology	✓
Renewed Connect&Go-technology	✓
Click&Safe-technology	✓
Certificates	
Declaration of Performance [DoP]	DOP-2016SC00006
Wind tunnel test report	WTT17-003
Warranty	
10 year warranty on coating of aluminium profiles	✓
7 year warranty on Fixscreen Technology	✓
7-year warranty on Detecto Renson motor Safety First	✓
5-year warranty for electronic controls [motor & automation]	✓
5-year product warranty	✓
5-year warranty on fabric collection	✓
5-year warranty on gloss level	✓

TECHNICAL DRAWINGS

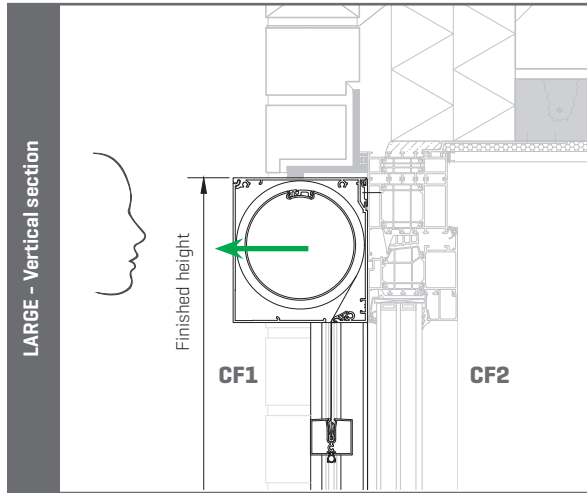


Viewing direction determines selection option cable feed left or right


← Direction removable fabric roller

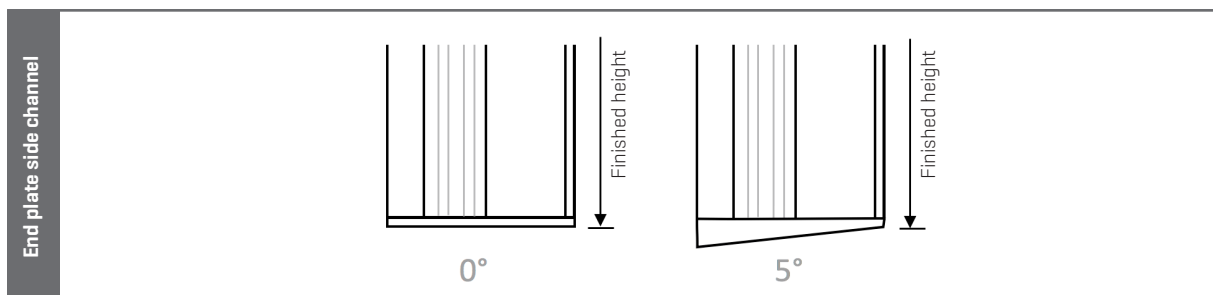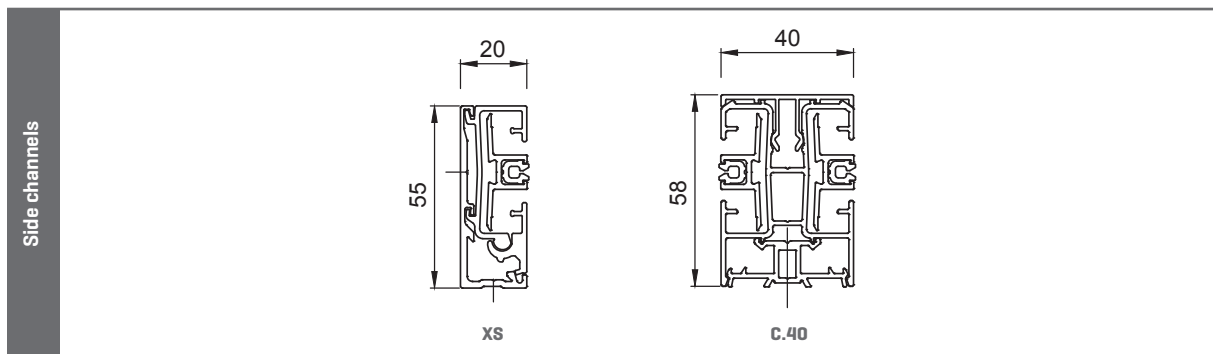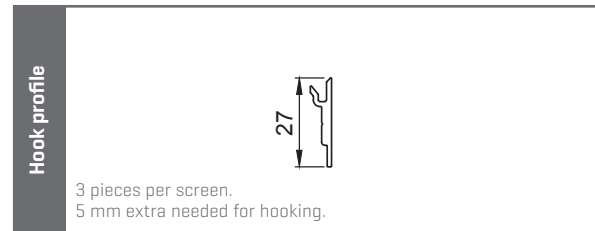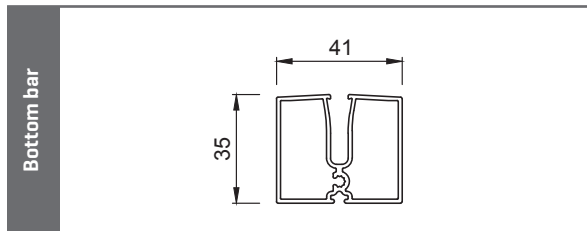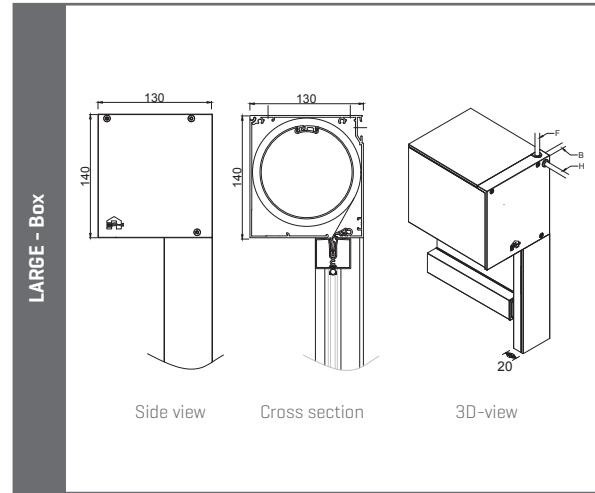


Cable passage F with hook profile

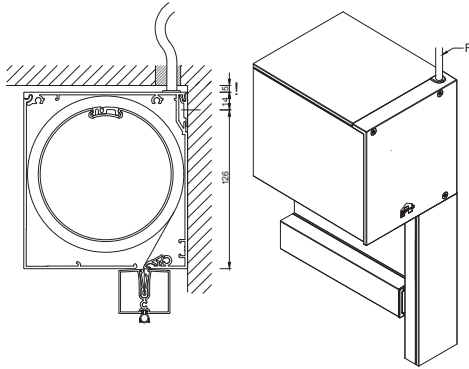

Cable passage B/H with hook profile

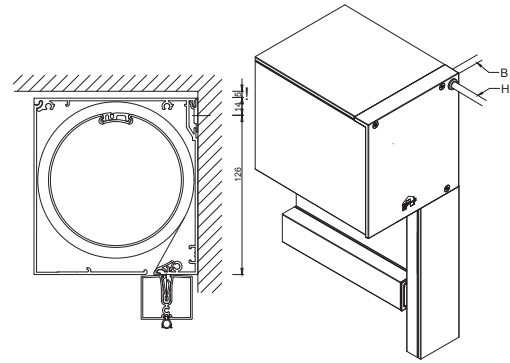

Cable passage F without hook profile

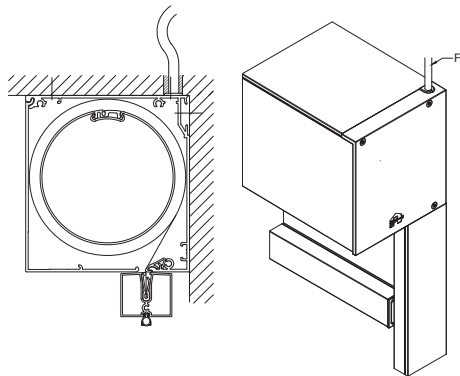

Cable passage B/H without hook profile

