


TECHNICAL DATA

	Large
Design	
Box size [H x D]	180 x 130 mm
Square	✓
Bottom bar retractable	✓
Wind resistance	
Wind class EN13561:2004	3
Guaranteed wind resistance	Up to 100 km/h in closed position
Control	
Detecto Renson motor Safety First	✓
Somfy io motor	✓

DIMENSIONS

		Large	
Dimensions single screen			
Glass fibre fabric Sergé / Natté / Privacy	Min. width Somfy io	900 mm	
	Min. width Detecto	670 mm	
	Max. width	4500 mm	6000 mm
	Max. height	4000 mm	3800 mm
	Max. surface	18 m ²	22,8 m ²

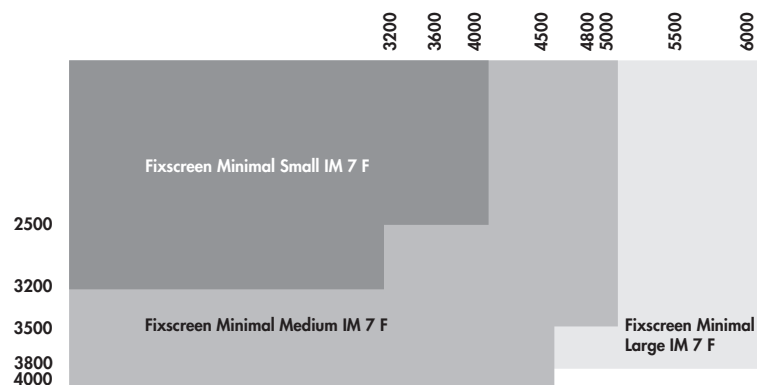



Note:

- Screens are always motorized.
- L head box
 - Supplementary fixation in the middle from 3600 mm width onwards.
 - Mandatory fixation on the sides with usage of side guiding channel XS


DURABILITY

Technology	
Fixscreen-technology	✓
Smooth-technology	✓
Renewed Connect&Go-technology	✓
Click&Safe-technology	✓
Certificates	
Declaration of Performance [DoP]	DOP-2016SC00006
Wind tunnel test report	WTT17-002
Warranty	
10 year warranty on coating of aluminium profiles	✓
5 year warranty on Fixscreen Technology	✓
7-year warranty on Detecto Renson motor Safety First	✓
5-year warranty for electronic controls [motor & automation]	✓
5-year product warranty	✓
5-year warranty on fabric collection	✓
5-year warranty on gloss level	✓

TECHNICAL DRAWINGS

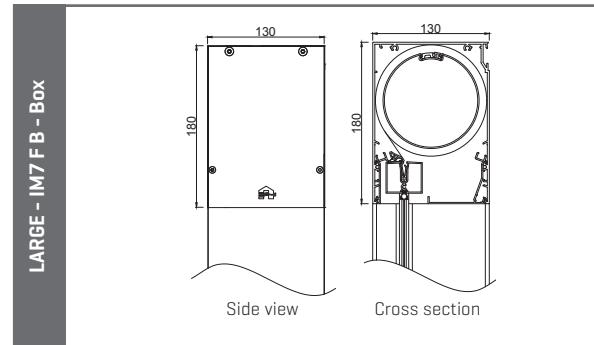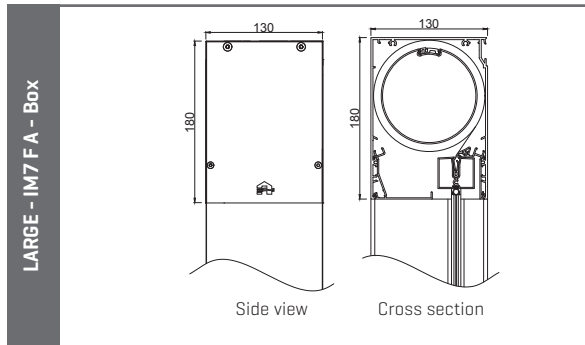


TECHNICAL DRAWINGS - SIDE CHANNELS





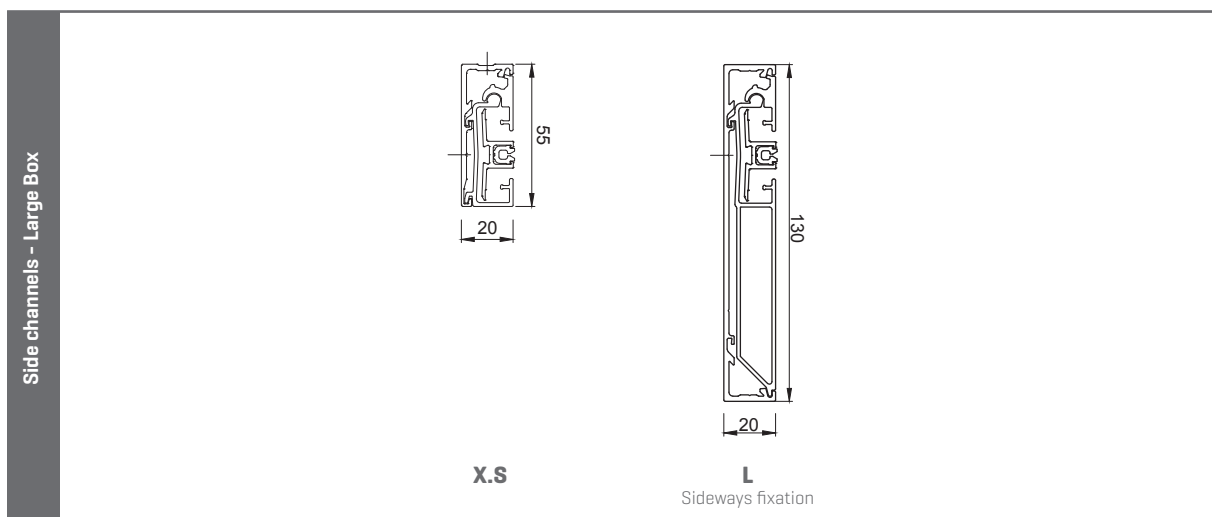


Note:



- When choosing side guiding channel XS, the customer must provide something removable below the box to facilitate removing the fabric tube towards the bottom. [H = min. 680 mm]

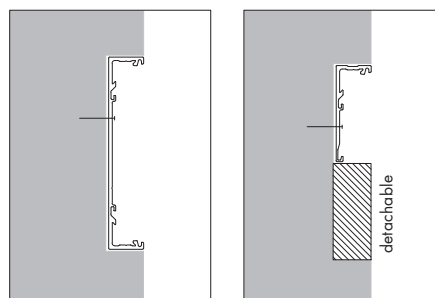

TECHNICAL DRAWINGS

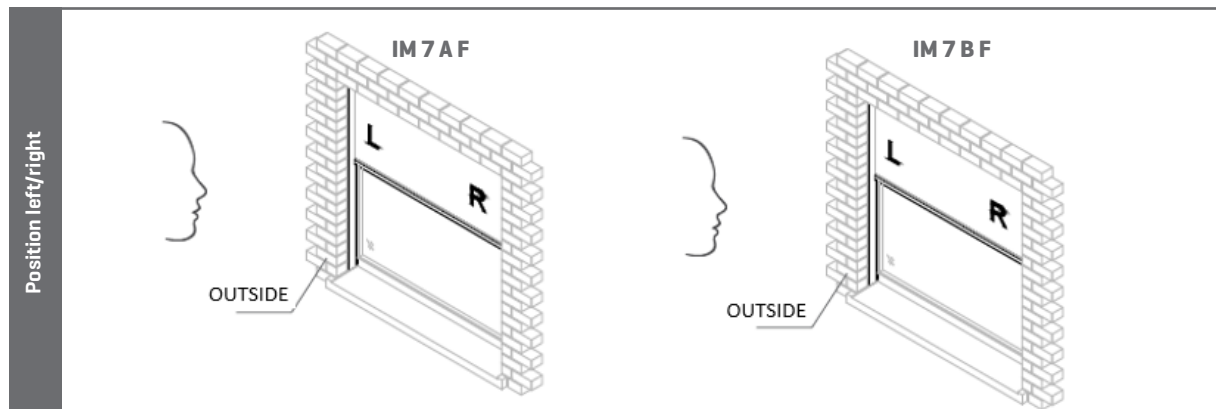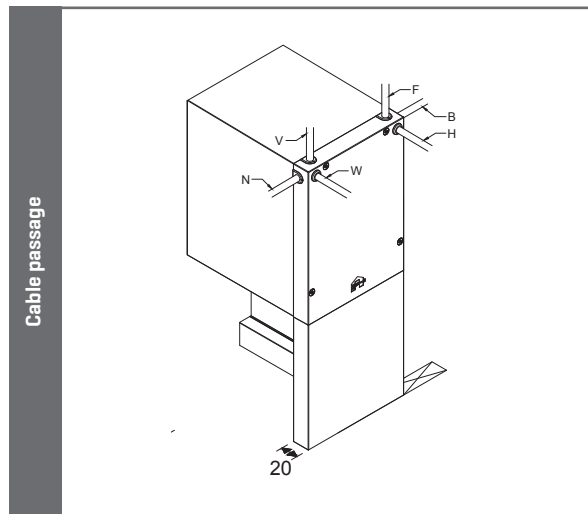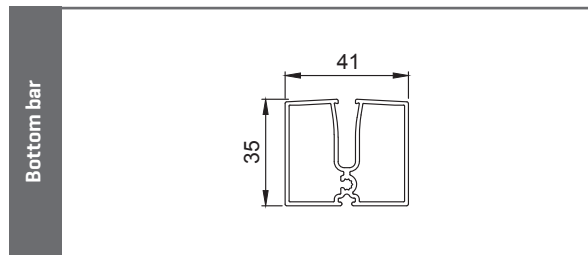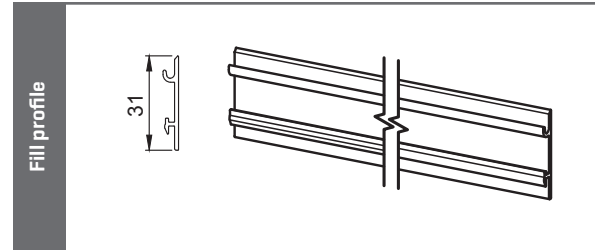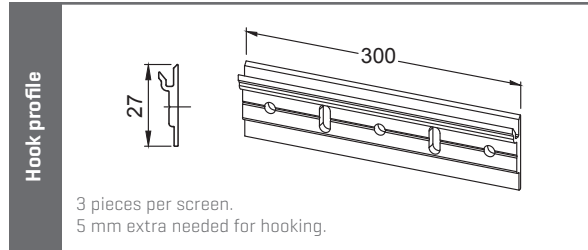

TECHNICAL DRAWINGS - SIDE CHANNEL L

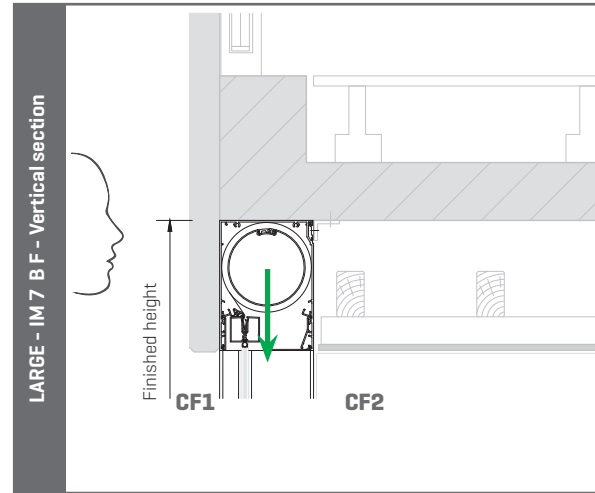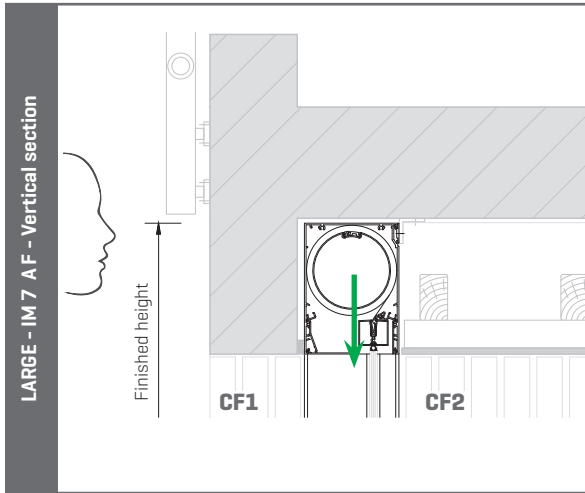

Viewing direction determines selection option cable feed left or right.

 Direction removable fabric roller.

