

394

Linear bar grille for self-assembly

LINEAR BAR
GRILLE

ALUMINIUM



MATERIAL

- Made from aluminium sections: AlMgSi 0.5 [according to EN 12020-2]
- Finishing: anodized in satin colour [20 micron] or powder-coated in any RAL or Syntha Pulvin colour [40 micron]

Remark: Grille not to be walked on.

DIMENSIONS

- Bar spacing: 9.5 mm
- Section length: 3 or 5.6 metres
- 394/2
 - Length linear bar grille: min. 110 mm - max. 3510 mm
 - Width linear bar grille:
 - Per grille element: min. 55 mm - max. 220 mm
 - Coupled: max. 1055 mm
- 394/3:
 - Length linear bar grille without frame: min. 100 mm - max. 3500 mm
 - Width linear bar grille without frame:
 - Per grille element: min. 45 mm - max. 209 mm
 - Coupled: max. 1045 mm
- Clip length: 209 mm
- Bars arranged lengthwise

FIXING

- No fasteners

NUMBER OF CLIP SECTIONS/LENGTH


- 300 - 500 mm: 2 pieces
- 501 - 900 mm: 3 pieces
- 901 - 1300 mm: 4 pieces
- 1301 - 1700 mm: 5 pieces
- 1701 - 2100 mm: 6 pieces
- 2101 - 2600 mm: 7 pieces
- 2601 - 3000 mm: 8 pieces

ELEMENTS

- Simple clip assembly

TYPICAL APPLICATIONS

- Counters, radiator frame

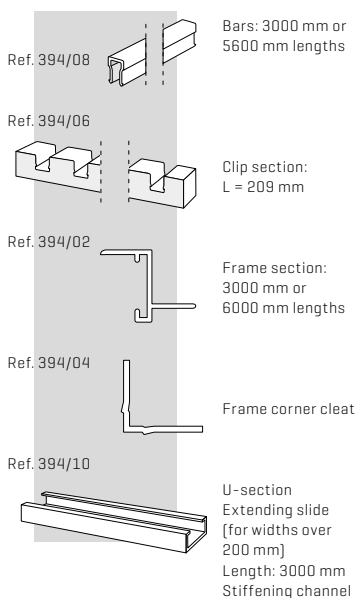


TECHNICAL SPECIFICATIONS

All properties are valid for the standard version of the Louvre, unless otherwise stated.


Technical data	
Visual free area	59%
Physical free area	59%



TECHNICAL DRAWINGS

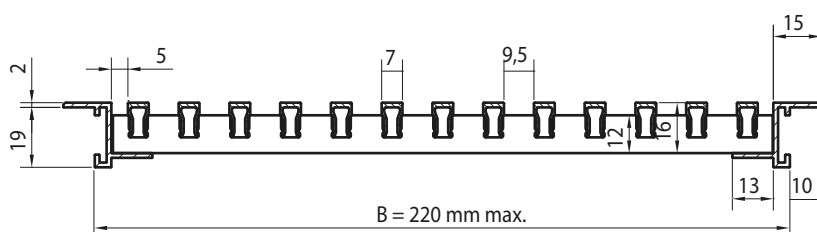

394/2: linear bar grille with flanged 'Z' frame

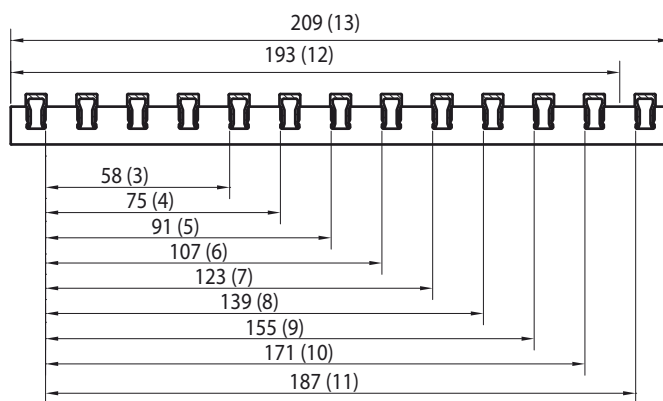

394/3: flangeless linear bar grille

Cross-sections